

Access Ladders

Mild Steel Galvanised
Simple Solutions for Complex Access

Access Ladders

Access Ladders provide a simple access solution to roof or raised flooring height for maintenance and other occasional use.

The access ladder range is the result of extensive Research & Development. This investment in both design & manufacturing technology has allowed us to create an access ladder system designed in accordance with BS 4211:2005 & A1:2008 and manufactured in accordance with BS EN ISO 3834-2:2005 and BS EN 1090-1:2009 + A1:2011 & 2:2008.

This has produced an accurately manufactured product which is both easy to specify and install.

Our aim has been to create a standard range of "flat pack access ladders". An off the shelf product which will meet the challenges you face when creating safe access at height.

- The Access Ladder range offers on-site adjustment to meet your needs whilst giving the safety and finished appearance of a bespoke product.
- Ladders are available with either a simple step through at the head or a platform to clear obstructions with the option of a step down to suit. You can either fit your own fall protection system in accordance with EN 353-1 or Hoops can be supplied from stock where required.
- Ladders can be supplied with either a bracketry fixing kit or with freestanding feet where floor/ roof penetration is not possible.
- All products have been approved through the necessary safety and structural calculations and are supplied in compliance with BS EN ISO 3834-2:2005 & BS EN 1090-1:2009 + A1:2011 & 2:2008 & are CE Marked.



ROOF SAFETY
SUPPLIES LIMITED

Ladder with step through - no hoops



Hooped Ladder with platform




Ladder with step through & step down - no hoops



Only three simple details needed to order your Access Ladder

Using your measurement **A**,
Head Layout & Base Fixing
information we can identify the
components that you require

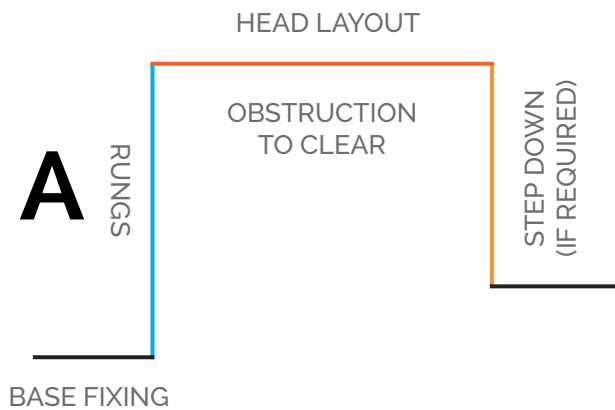

Height A (mm)	Rungs
0 - 467	1
487 - 717	2
737 - 967	3
987 - 1217	4
1237 - 1467	5
1487 - 1717	6
1737 - 1967	7
1987 - 2217	8
2237 - 2467	9
2487 - 2717	10
2737 - 2967	11
2987 - 3217	12
3237 - 3467	13
3487 - 3717	14
3737 - 3967	15
3987 - 4217	16
4237 - 4467	17
4487 - 4717	18
4737 - 4967	19
4987 - 5217	20
5237 - 5467	21
5487 - 5717	22
5737 - 5967	23

Mild Steel Galvanised Ladder

All ladder heights are available with either top step-through only or platform.

All ladder heights are available with option to either affix to masonry at base or supplied with freestanding feet.

Step Down also available to suit (if required).

Ascent ladders are 400mm wide and can be supplied with or without safety hoops.

All ladders can be supplied with a range of wall fixing brackets to suit masonry, steel or metal profile cladding.

Access Ladders

Access Ladders provide a simple fixed access solution to roof or raised flooring height for maintenance and other occasional use.

Designed to BS 4211:2005 + A1:2008 specification for permanently affixed ladders

Manufactured in accordance with BS EN ISO 3834-2:2005 & BS EN 1090-1:2009 + A1:2011 & 2:2008 and CE Marked

General arrangement drawings provided.

Supplied flat pack with easy to follow installer instructions

Assembly fixings supplied, fixings to structure not included

Design incorporates on-site levelling adjustment

Standards range of heights upto 10m

Standard platform lengths up to 1500mm

Aluminum ladders are 60% lighter than their mild steel galvanised equivalent.

Making for an easier installation.



ROOF SAFETY
SUPPLIES LIMITED

